SUPERSEDES
NOV. 1984

SEPTEMBER 1986

MODEL 3RB PUMP

SPEED - 1800 RPM

CLOSED IMPELLER

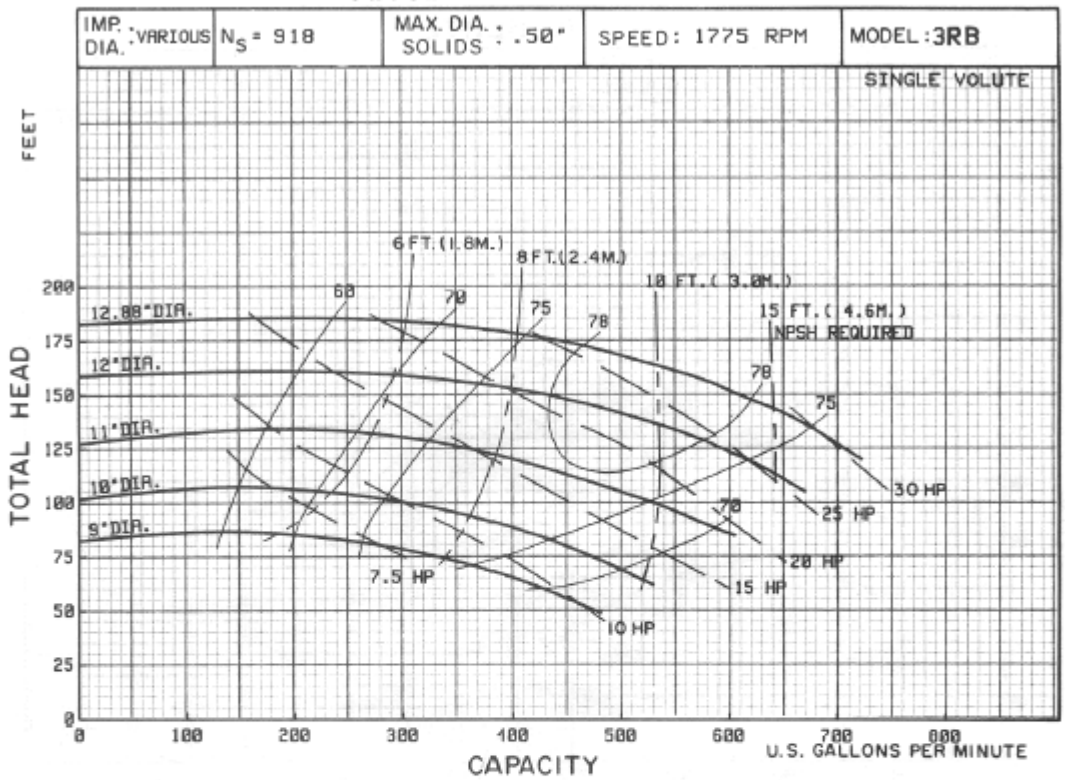

FT. x (.305) = METERS

GPM x (.227) = CUBIC METERS PER HOUR

HP	MAXIMUM IMPELLER DIAMETER	
	FOR FULL MOTOR LOAD	FOR FULL MOTOR LOAD + 15% S.F.
30	A(12.81")	A+(12.88")
25	B(11.88")	B+(12.62")
20	C(11.12")	C+(11.62")
15	D(10.44")	D+(10.75")
10	E(9.00")	E+(9.56")

Performances shown are for close-coupled electric configuration with packing. Other mounting styles may require horsepower and/or performance adjustments.

CORNELL PUMP CO. — PORTLAND, OREGON