SUPERSEDES 132-55,55C
APR. 71

APRIL 1985

MODEL 4WB PUMP

SPEED - 3600 RPM

CLOSED IMPELLER

60 HERTZ

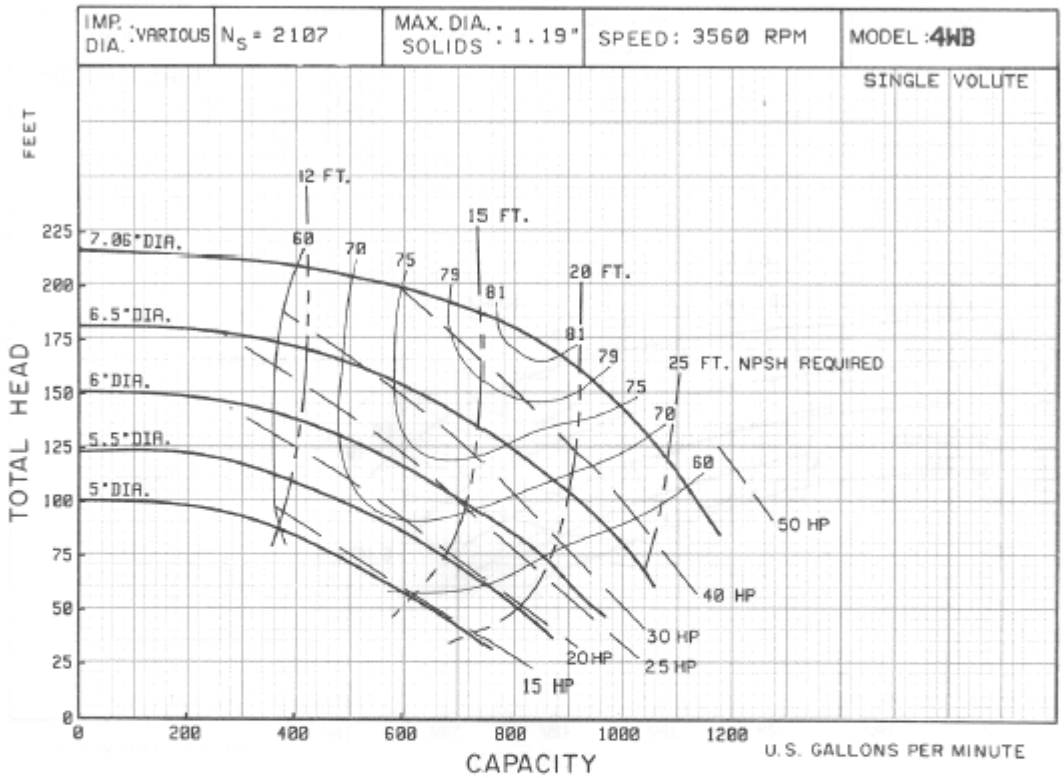

HP	MAXIMUM IMPELLER DIAMETER: FOR FULL MOTOR LOAD	MAXIMUM IMPELLER DIAMETER: FOR FULL MOTOR LOAD + 15% S.F.
50	A(7.06")	
40	B(6.62")	B+(7.0")
30	C(6.25")	C+(6.44")
25	D(5.88")	D+(6.12")
20	E(5.5")	E+(5.81")
15	F(5.0")	F+(5.38")

FT. x (.305) = METERS

GPM x (.227) = CUBIC METERS PER HOUR

Performances shown are for close-coupled electric configuration with packing. Other mounting styles may require horsepower and/or performance adjustments.

CORNELL PUMP CO. — PORTLAND, OREGON