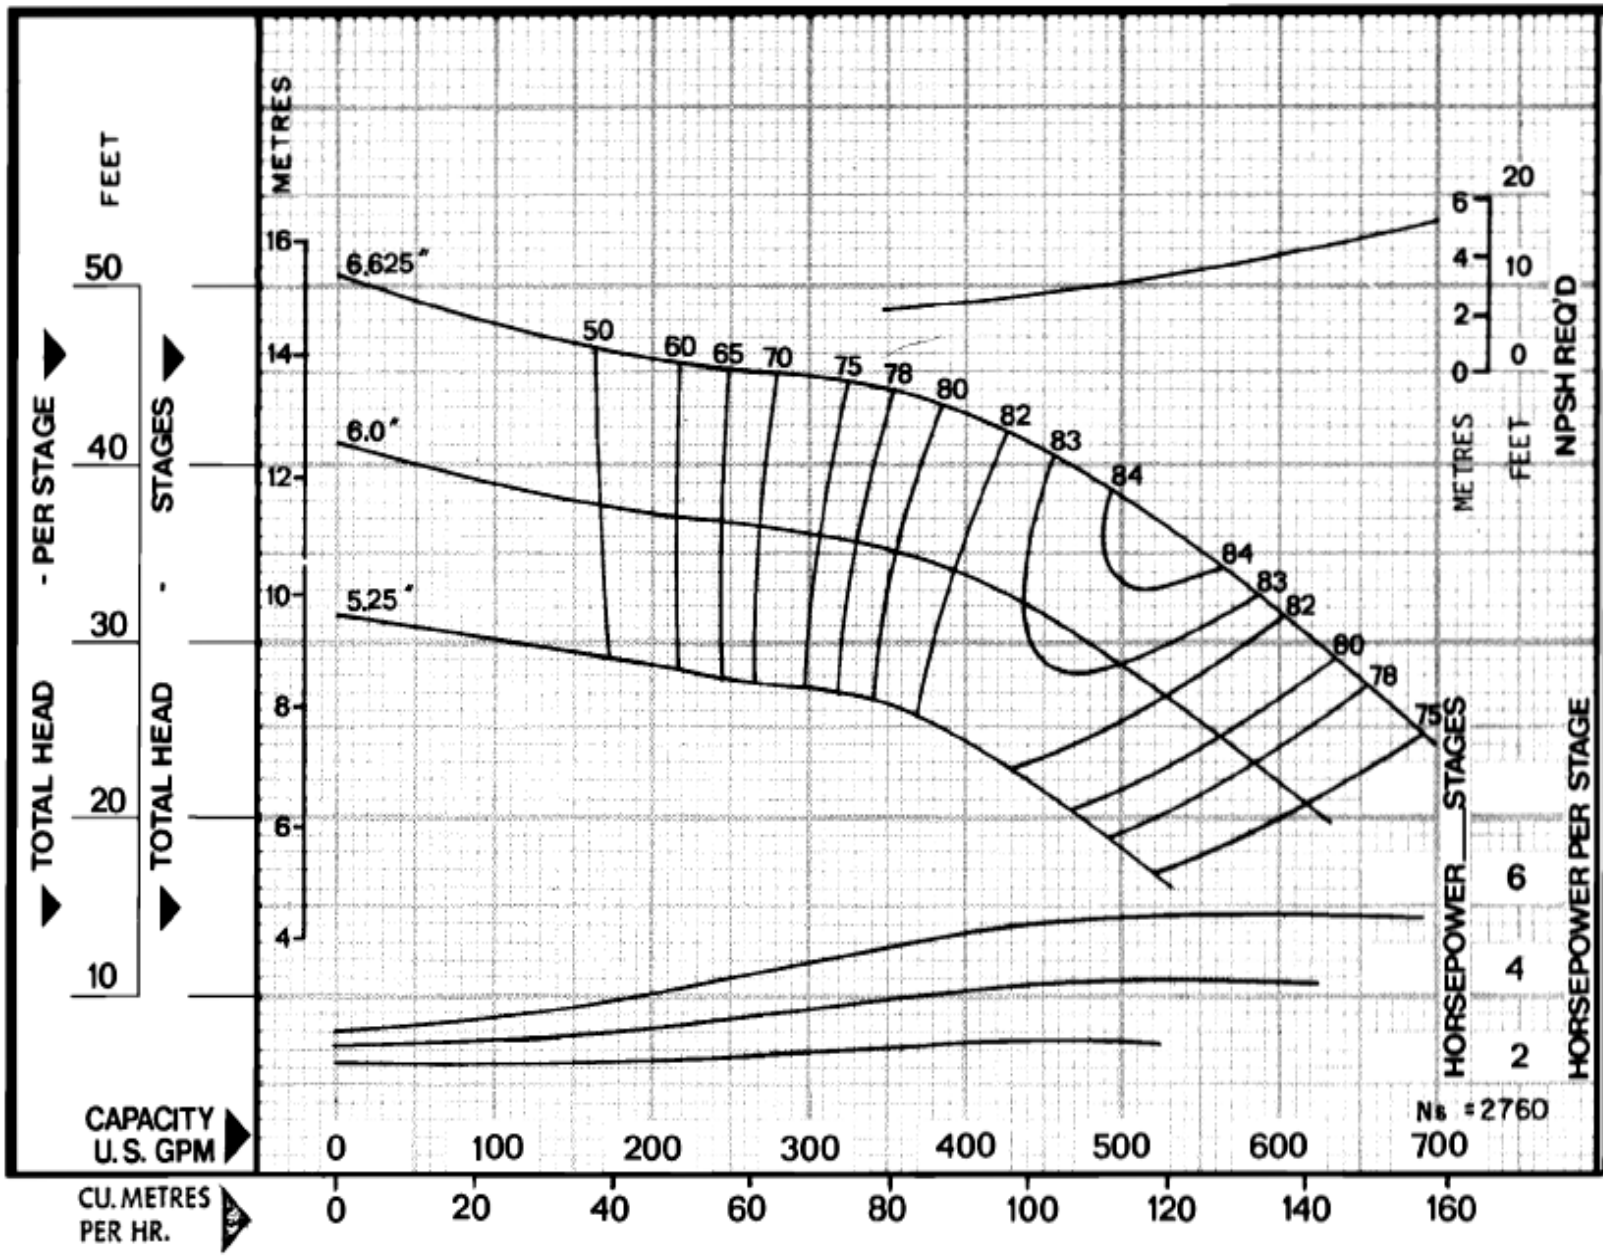

Curve No. 1103

Size: 10 JLO

RPM: 1760

EFFICIENCY CHANGE

STGS.		
	1	-4
	2	-2
	3	-1

PERF. BASED ON: BRZ. IMPELLERS & C.I. VITRIGLASS ENAMELLED BOWLS

Impeller = OPEN

K = 9.5 Lbs./Ft. 14.1 Kg./M.

K (Bal.) =

GOULDS PUMPS

VERTICAL PUMP DIVISION
CITY OF INDUSTRY, CALIFORNIA

Characteristc based upon pumping clear, non-aerated water.

Rating point only is guaranteed. Column losses not included.

PAGE 5C33

DATE July 22, 1977

SUPERSEDES New