PER STAGE	IMP. DIAM. EXIT	IMPELLER PART NO. 1516 IMPELLER PATTERN NO. 1460	THRUST CONSTANT 11.6 WR² .854 LB. FT²/STAGE	PUMP SHAFT DIAM. 1 11/16" INCHES

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 12"

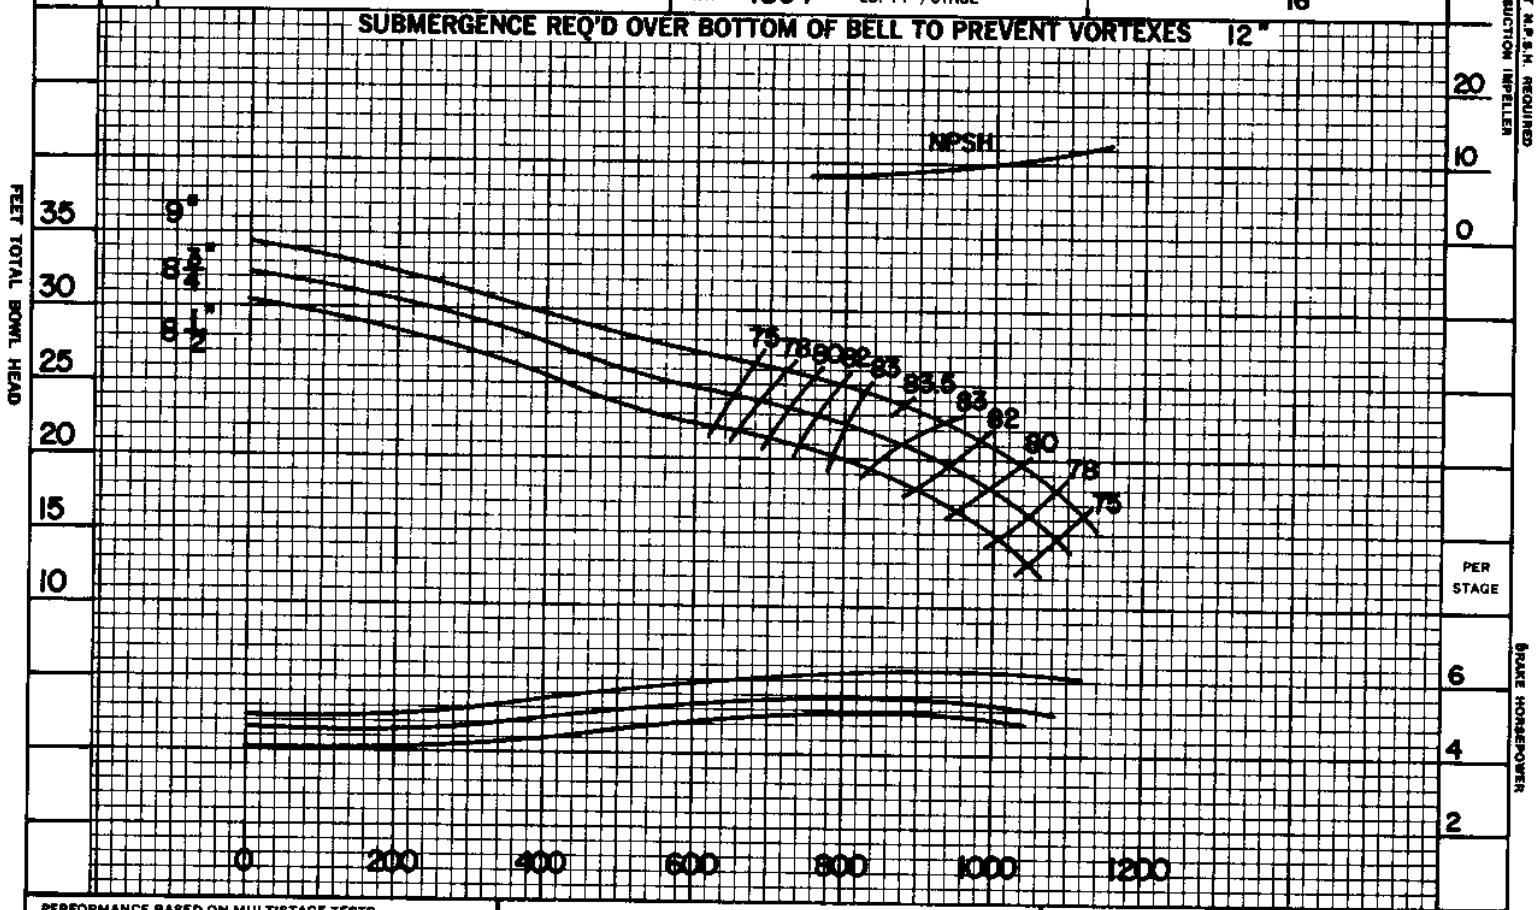

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY .95

FOR 2 STAGES MULTIPLY HD. & EFF. BY .98

DATE 2-13-78

U.S. GALLONS PER MINUTE

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

12 DC TURBINE PUMP 1170 RPM

IMPELLER – BRONZE

BOWL – CAST IRON VIT. ENAMELED

CURVE SHEET NO. EC-2534

JP-341A