| PER STAGE | IMP. DIAM. EXIT | IMPELLER PART NO. 3855<br>IMPELLER PATTERN NO. 3801 | THRUST CONSTANT 2.0<br>WR² .020 LB. FT²/STAGE | PUMP SHAFT DIAM. $\frac{3}{4}$" INCHES |
|---|---|---|---|---|

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 5"

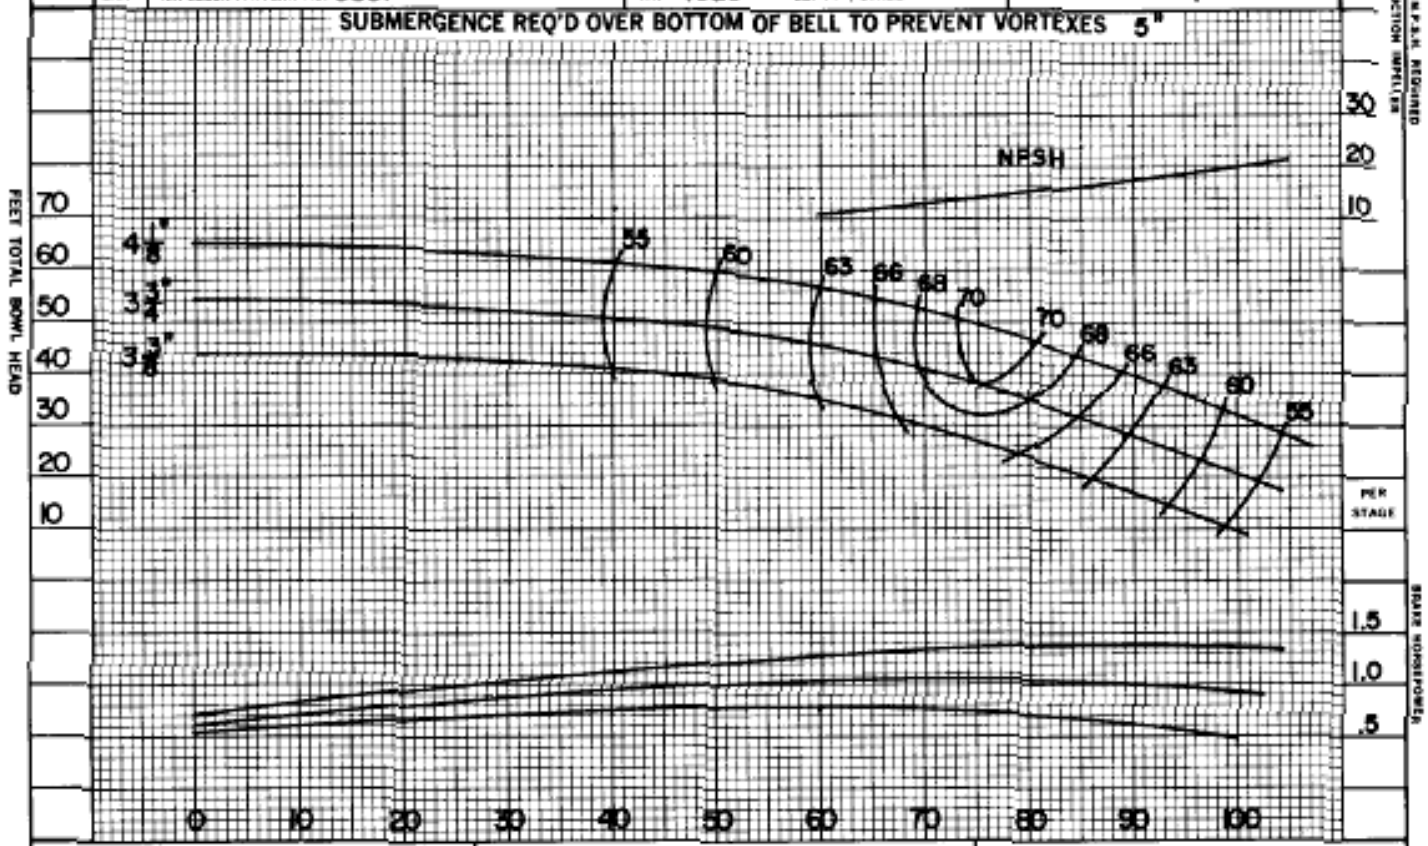


PERFORMANCE BASED ON MULTISTAGE TESTS PUMPING CLEAR COLD WATER SP. GR. 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY .95

FOR 5 STAGES MULTIPLY HD. & EFF. BY .99

DATE 11-18-86

**Johnston Pump Company**
Glendora, California 91740
ESTABLISHED 1909

6 AS TURBINE PUMP 3500 R.P.M.

IMPELLER – BRONZE

BOWL – CAST IRON VIT. ENAMELED

CURVE SHEET NO. EC-2498

JP 1134