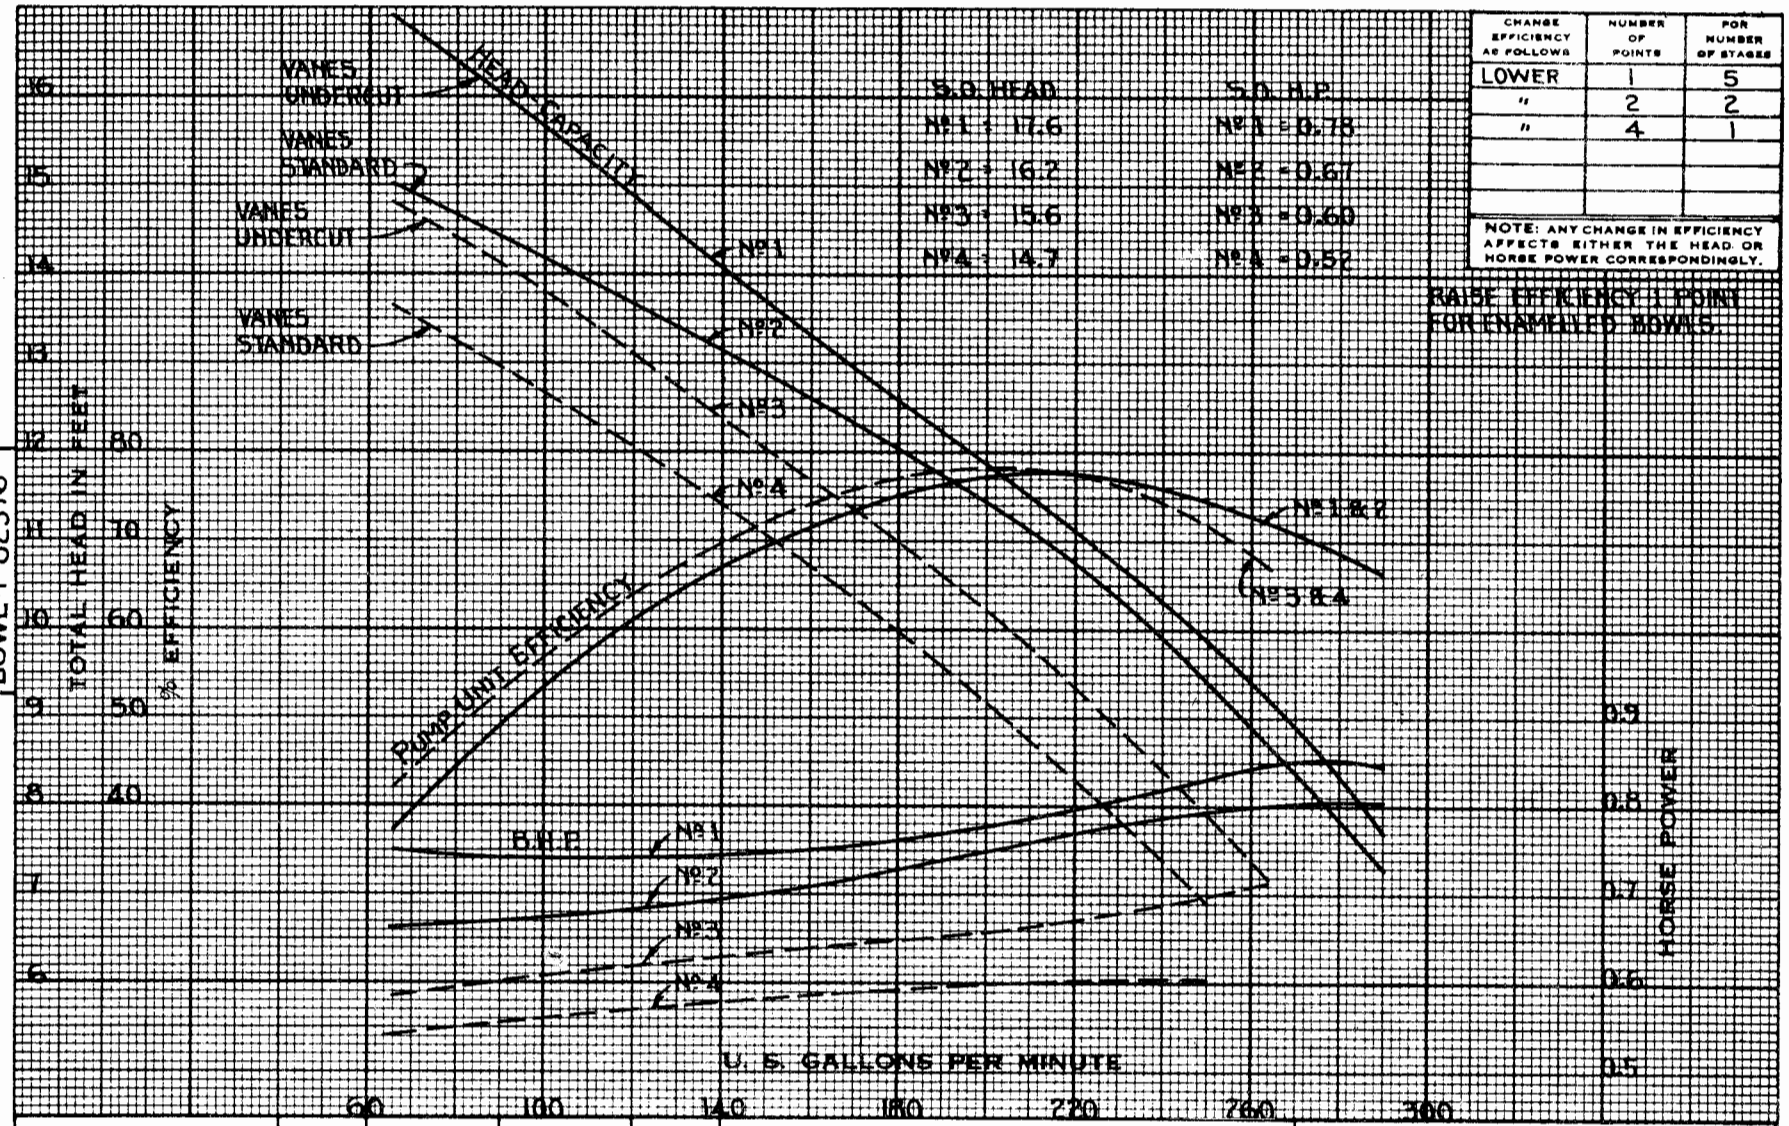

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR NUMBER OF STAGES
LOWER	1	5
"	2	2
"	4	1

NOTE: ANY CHANGE IN EFFICIENCY AFFECTS EITHER THE HEAD OR HORSE POWER CORRESPONDINGLY.

HYDRAULIC PERFORMANCE

GUARANTEED AT THE DESIGNATED POINT ONLY AND IS CONTINGENT ON WELL PROPERLY FURNISHING PUMP WITH NON-AERATED OR NON-GASEOUS WATER FREE FROM ABRASIVES. PUMP BOWLS MUST BE PROPERLY ADJUSTED FOR THE HEAD AT WHICH THEY OPERATE AND MUST BE SUBMERGED.

CURVE NO.	IMPELLER NO.	IMPELLER DIA.	TAKEN FROM
1 & 2	T-84234	$5\frac{11}{16}$"	4176 4171
3 & 4	T-84229	$5\frac{11}{16}$"	4152 4139

PEERLESS PUMP DIVISION
FOOD MACHINERY CORPORATION
LOS ANGELES 31, CALIF.

PEERLESS PUMPS

PERFORMANCE PER STAGE
8" MA DEEP WELL TURBINE PUMP
1160 R. P. M.
SHEET NO. R-1063

PRINTED IN U. S. A.