


BOWL 2608370  
C.I.E.

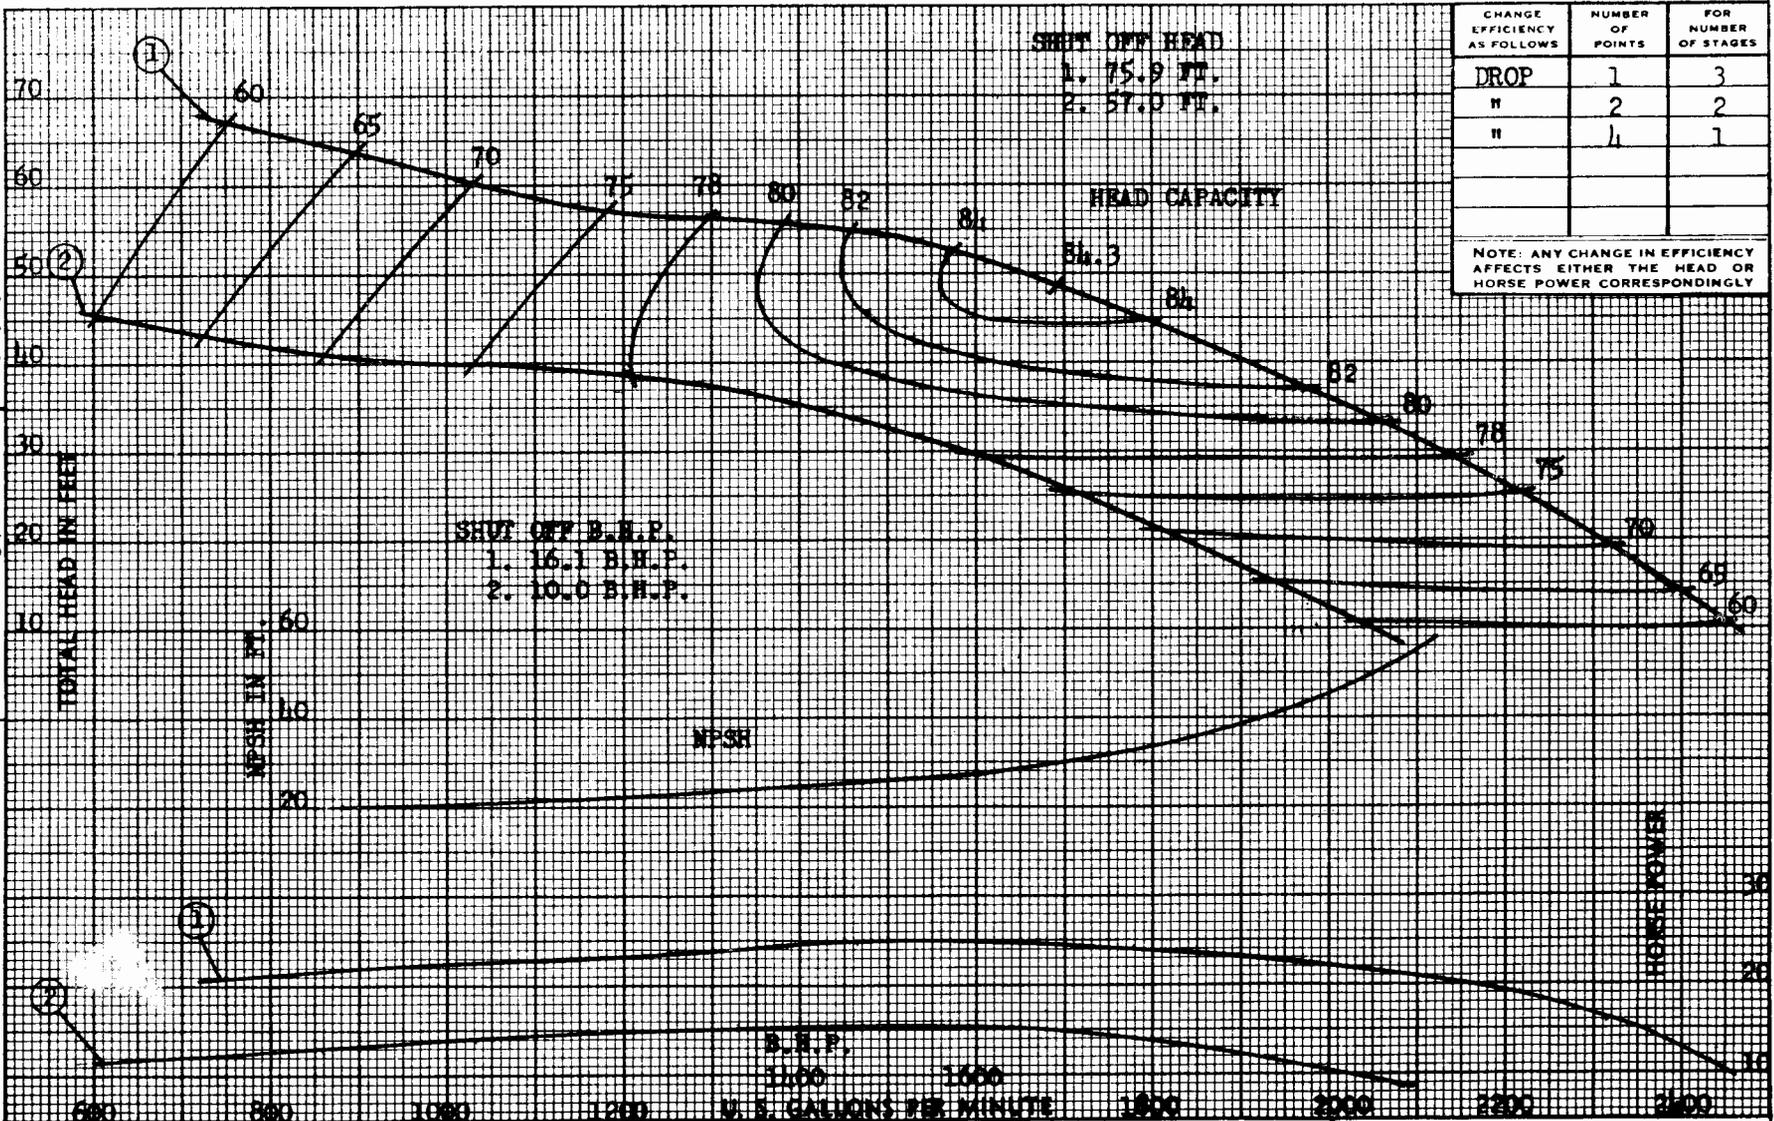

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR NUMBER OF STAGES
DROP	1	3
"	2	2
"	4	1

NOTE: ANY CHANGE IN EFFICIENCY AFFECTS EITHER THE HEAD OR HORSE POWER CORRESPONDINGLY

HYDRAULIC PERFORMANCE	CURVE NO.	IMPELLER NO.	IMPELLER DIA.	TAKEN FROM
GUARANTEED AT THE DESIGNATED POINT ONLY AND IS CONTINGENT ON WELL PROPERLY FURNISHING PUMP WITH NON-AERATED OR NON-GASEOUS WATER FREE FROM AB-RASIVES. PUMP BOWLS MUST BE PROPERLY ADJUSTED FOR THE HEAD AT WHICH THEY OPERATE AND MUST BE SUBMERGED.	1	2608368E	8-1/16 x 9-1/4	36872
	2	2608368E	7-15/32 x 8-9/16	
	3			

**fmc**

**PEERLESS PUMP**

HYDRODYNAMICS DIVISION

PERFORMANCE PER STAGE

DEEP WELL TURBINE PUMP

12 HXB

1760 R. P. M.

SHEET NO. 2830744