horizontally split centrifugal pumps

LR-LLR

EYE AREA = 19.6 SQ. IN., MAX. DIA. SOLIDS = 7/16", MAX. SHAFT BHP AT 1770 RPM = 60, 1175 = 31

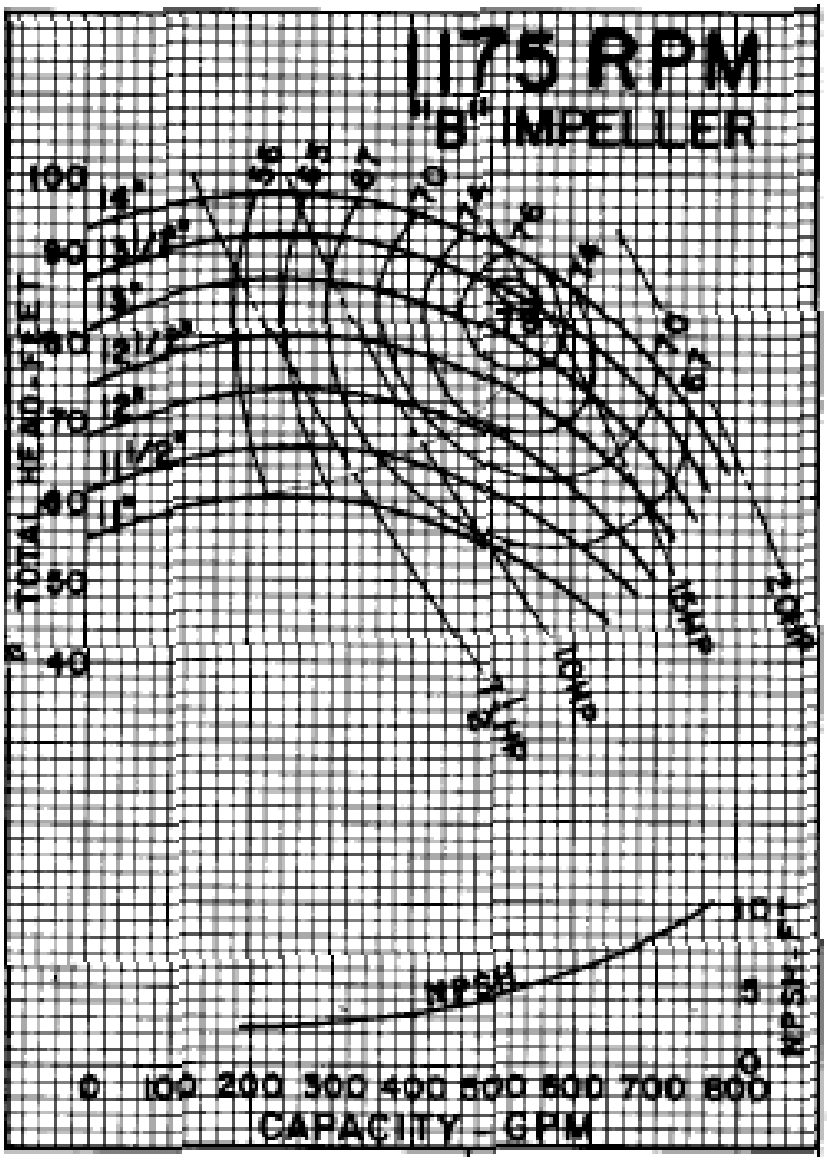

A-7300-R1	WORTHINGTON PUMP INC. — RATING CURVE	4LR-14 "B"

Minimum recommended flow – Sustained operation to the left of the slanted broken line could possibly result in shaft breakage due to fatigue.

horizontally split centrifugal pumps

LR-LLR

EYE AREA = 19.6 SQ. IN., MAX. DIA. SOLIDS = 1/2", MAX. SHAFT BHP AT 1770 RPM = 65, 1175 = 43

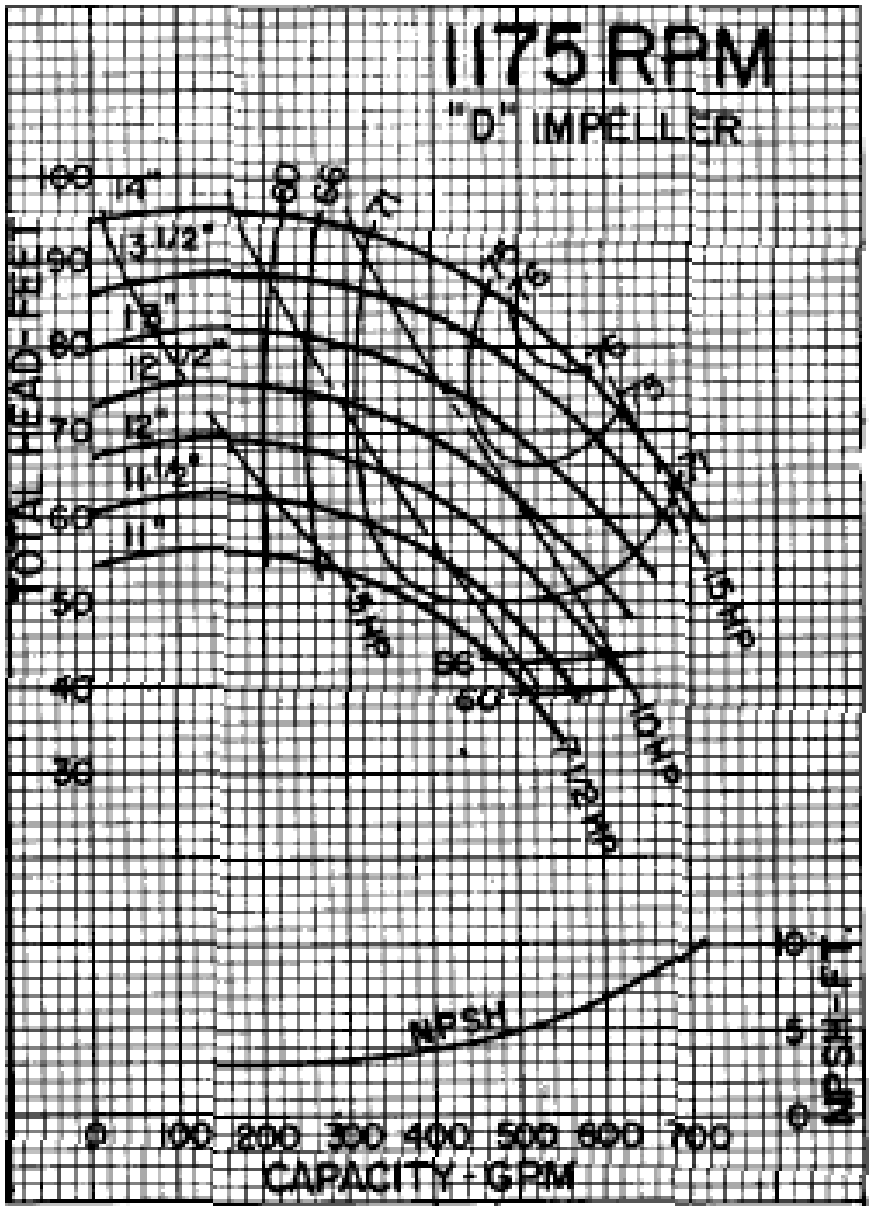

A-7301-R2	WORTHINGTON PUMP INC. – RATING CURVE	4LR-14

Minimum recommended flow – Sustained operation to the left of the slanted broken line could possibly result in shaft breakage due to fatigue.