Customer ____ Worthington S.O. ____
Project ____ Proposal/Order No. ____
Cust. Proposal/Order No. ____ Certified By ____
Customer Item No. ____ Date ____

Liquid/Service ____ Sp. Gr. ____ Visc. ____ SSU
Capacity ____ Head ____ Temp. ____ °F/°C Consistency ____ %

WORTHINGTON PUMP PERFORMANCE DATA

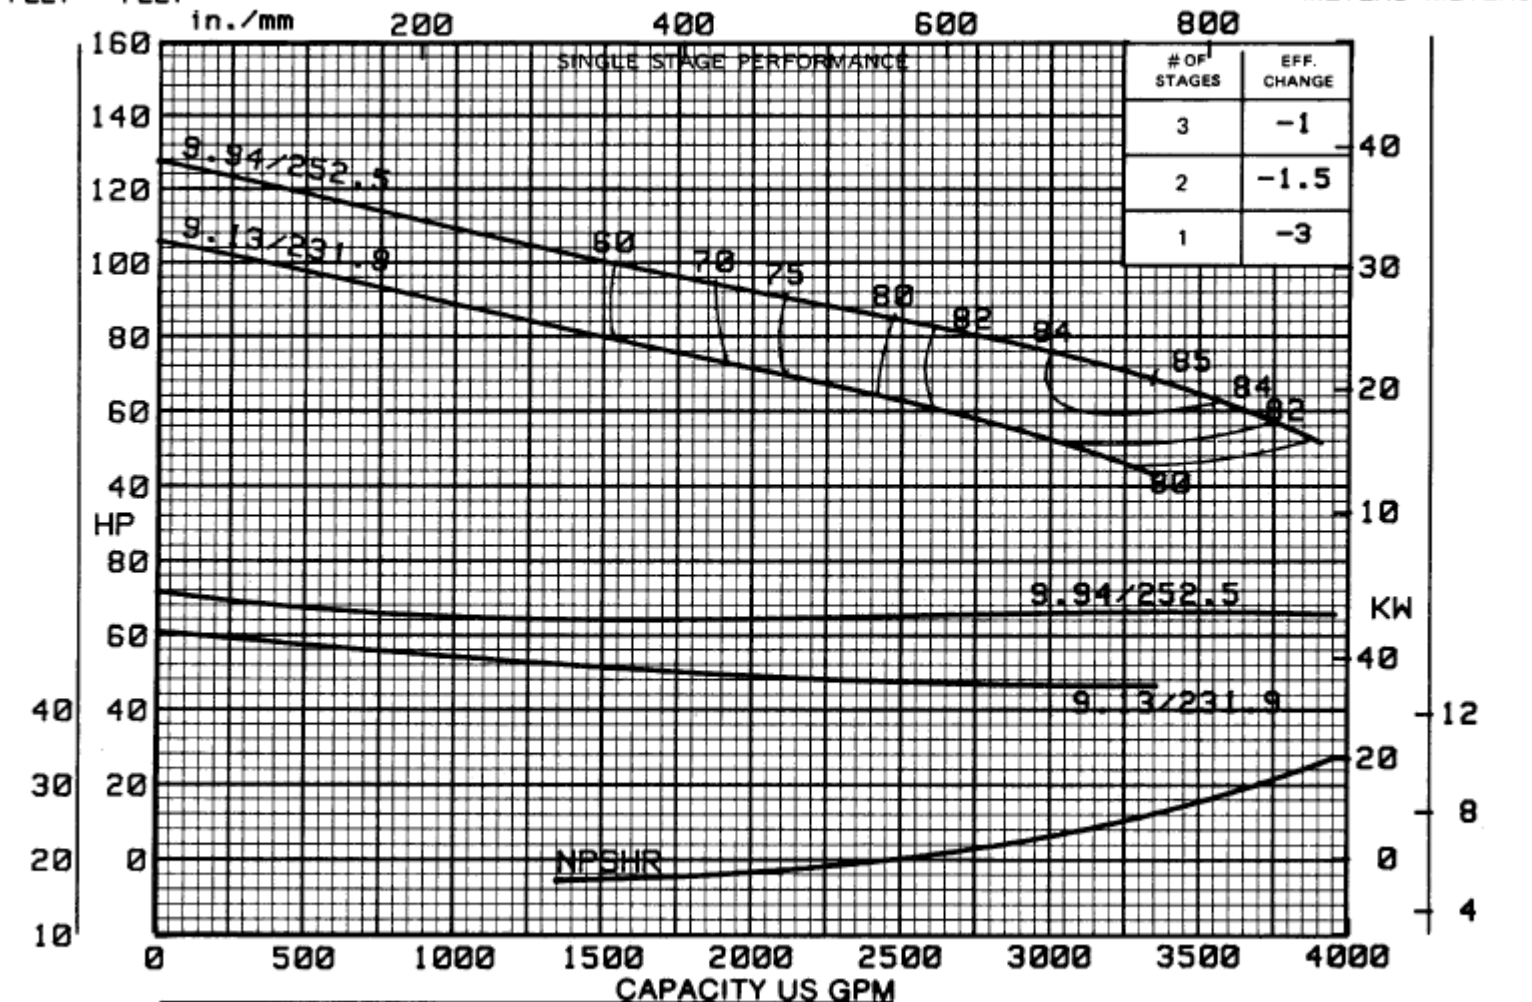

CURVE NO.	SIZE	RPM
A-24168	15HH340	1775

RATING CURVES
60 CYCLE

15HH – 340
1760 RPM

10 – 15 INCH – 1760 RPM

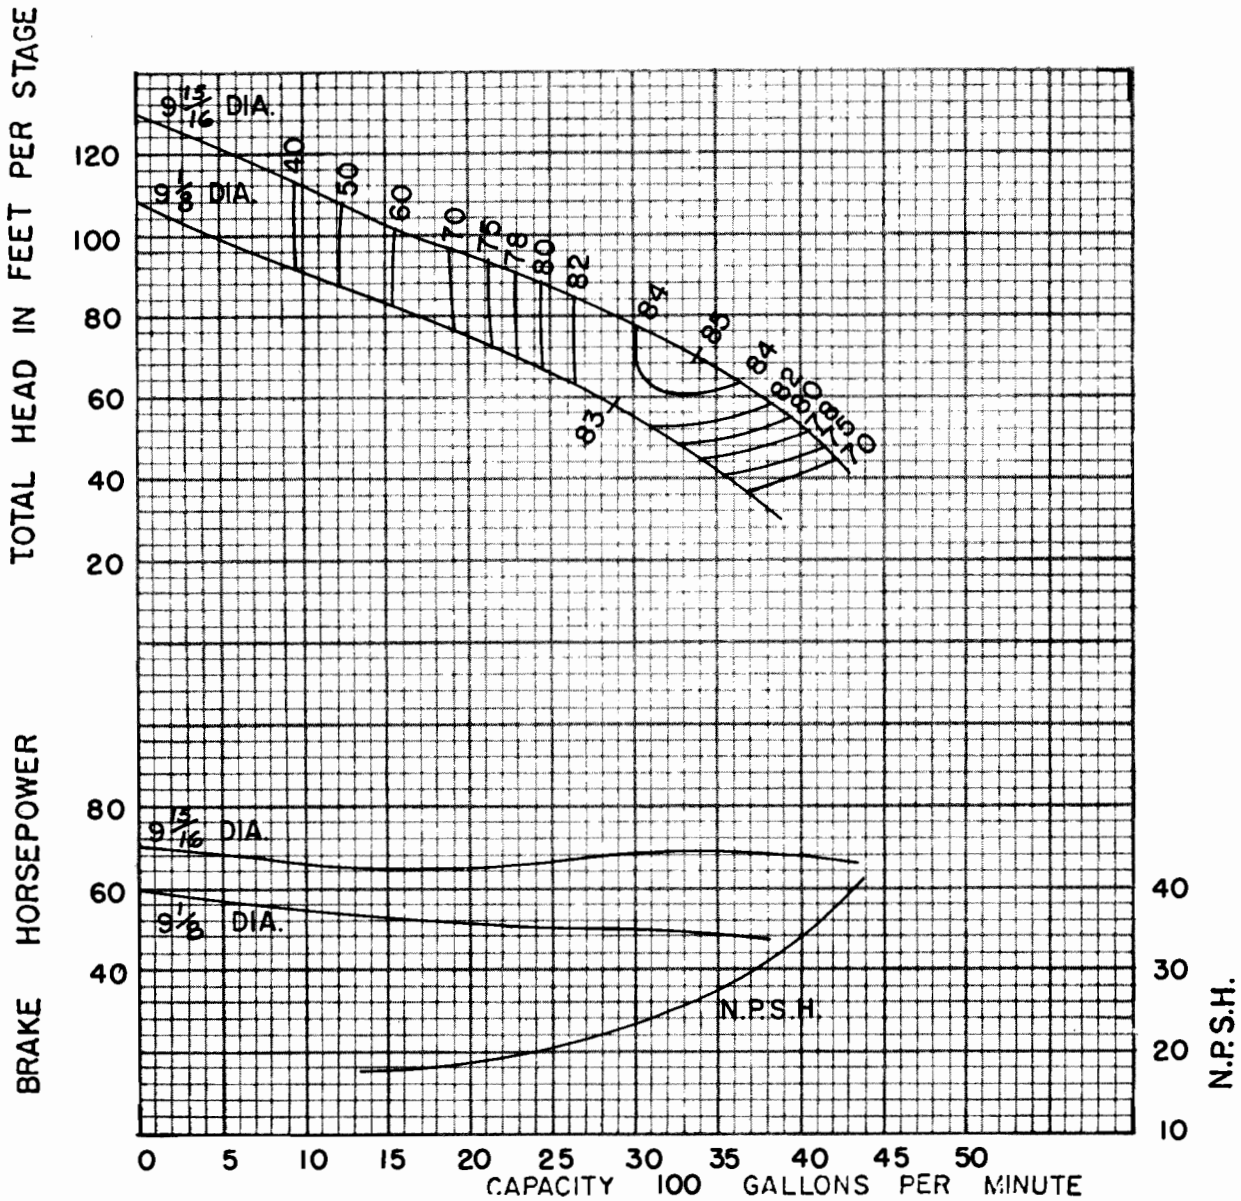

Efficiency shown is for 2 stages or more, with standard materials. For fewer stages or other materials change efficiency as shown.
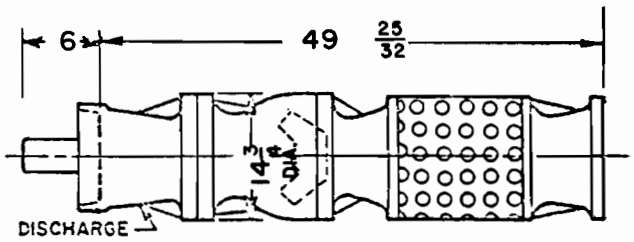
No. of stages	Eff. change	MATERIAL	Eff. chg.	Standard materials Impeller-bronze or c.i. Bowl-cast iron/enm.					
6	—	Imp.-bronze	—	Thrust factor	27				
5	—	Imp.-cast iron.	-1	Rotor wt.per stage	45				
4	—	Imp.-c.i. enm.	+1	Bowl wt. 1st stage	415	For additional stages add 15 1/4 per stage			
3	—	Bowl-c.i. enm.	—	Bowl wt. add'l stage	180	Column pipe	12	14	Shaft end plcy .81
2	—	Bowl-cast iron	-2	Max. bowl hp.	570				
1	-1	Bowl-bronze	-1.5	Impeller eye area(sq.in)	53.5	Impeller shaft dia.	2.25