# horizontally split centrifugal pumps

# LR-LLR

EYE AREA = 5 SQ. IN., MAX. DIA. SOLIDS = 1/4", MAX. SHAFT BHP AT 3550 RPM = 75, 1750 = 32

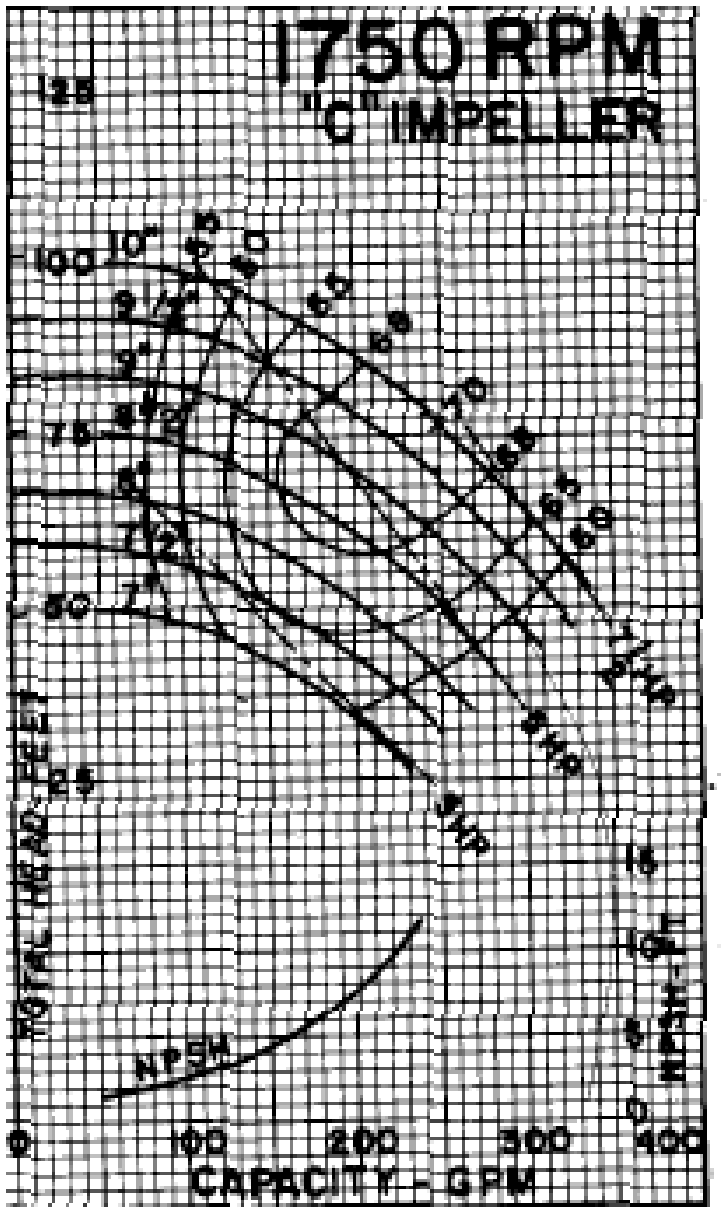


| A-7291-R1 | WORTHINGTON PUMP INC. — RATING CURVE | 2 1/2 LR-10"C" |
|---|---|---|

**Minimum recommended flow** – Sustained operation to the left of the slanted broken line could possibly result in shaft breakage due to fatigue.

# horizontally split centrifugal pumps

# LR-LLR

EYE AREA = 5.3 SQ. IN., MAX. DIA. SOLIDS = 1/4", MAX. SHAFT BHP AT 3550 RPM = 75, 1760 = 32

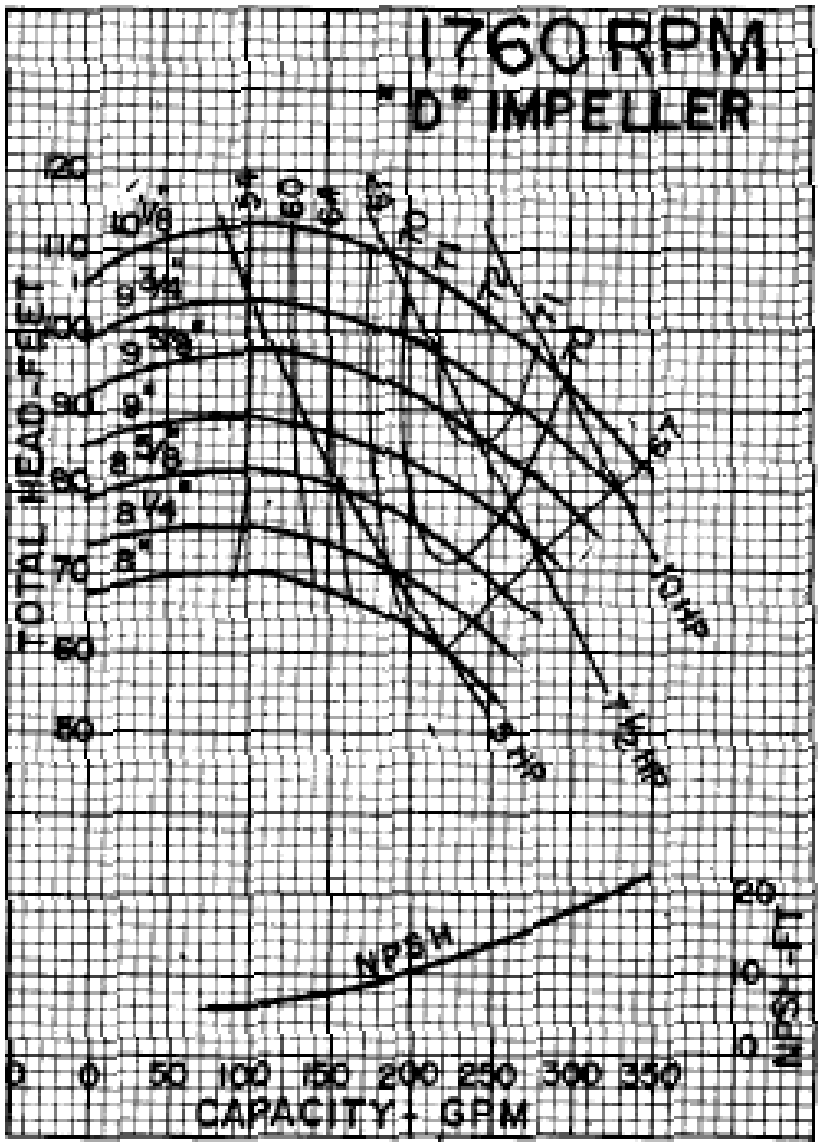


A-7292 R-1 | WORTHINGTON PUMP INC. — RATING CURVE | 2½-LR-10

**Minimum recommended flow** – Sustained operation to the left of the slanted broken line could possibly result in shaft breakage due to fatigue.