Customer _____ Worthington S.O. _____
Project _____ Proposal/Order No. _____
Cust. Proposal/Order No. _____ Certified By _____
Customer Item No. _____ Date _____

Liquid/Service _____ Sp. Gr. _____ Visc. _____ SSU
Capacity _____ Head _____ Temp. _____ °F/°C Consistency _____ %

WORTHINGTON PUMP PERFORMANCE DATA

CAPACITY M³/HR

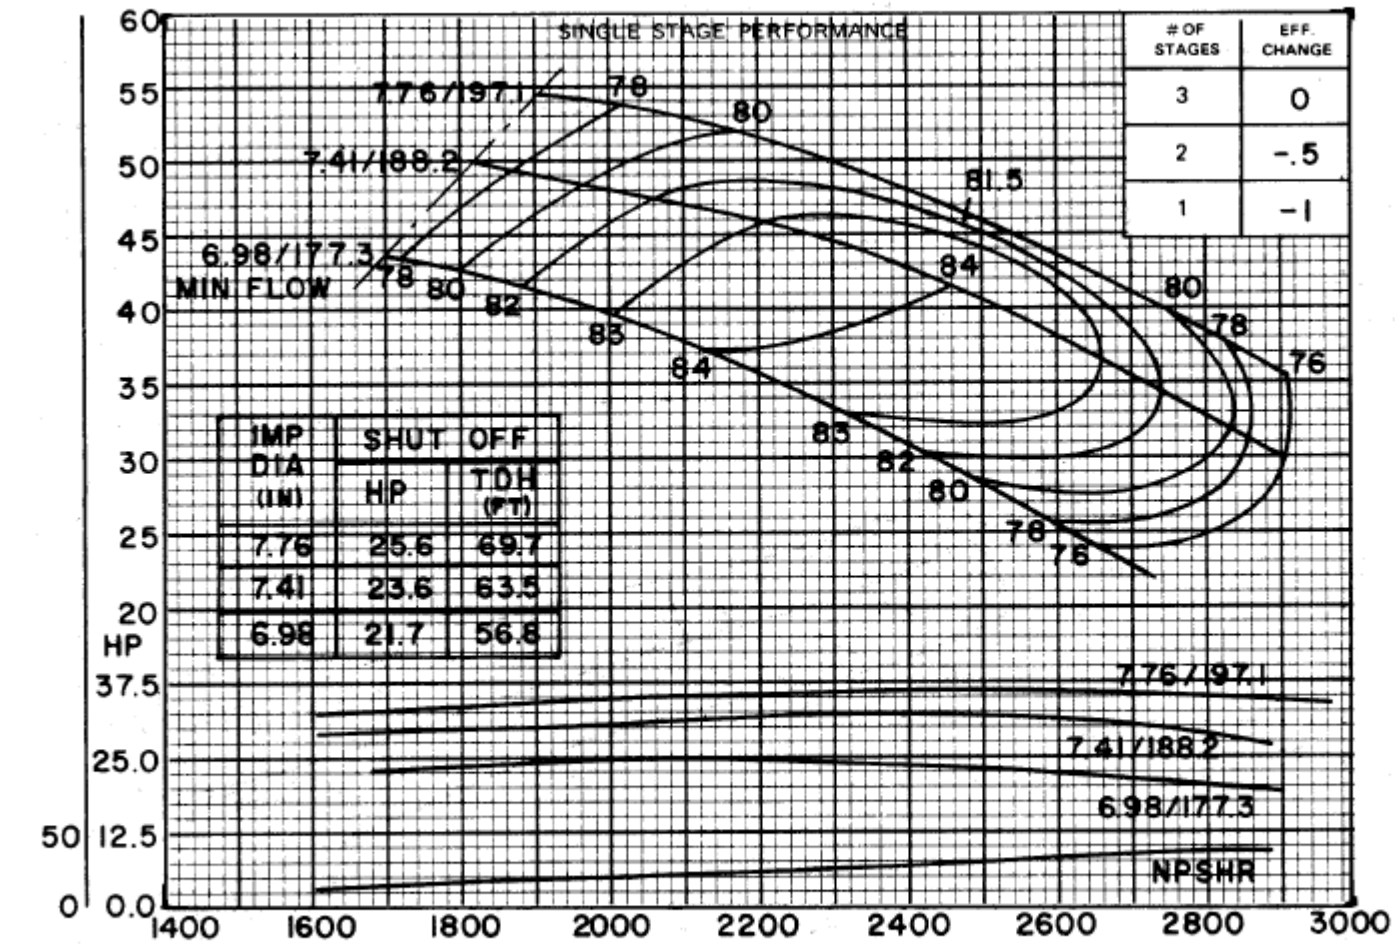

# OF STAGES	EFF. CHANGE
3	0
2	-.5
1	-1

IMP DIA (IN)	SHUT OFF HP	SHUT OFF TDH (FT)
7.76	25.6	69.7
7.41	23.6	63.5
6.98	21.7	56.8

CURVE NO.	SIZE	RPM
A24205K	12HHH245	1770